


## shower channel CeraLine F 1000 mm, DN 50

Part number: 520067  
 GTIN: 4001636520067  
 Rebate group: 8

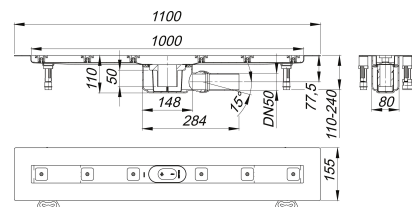

### Description:

shower channel CeraLine F 1000 mm, DN 50

conforming to DIN EN 1253

Linear drainage, with one drain body, outlet horizontal, ball-joint adjustable 0 – 15 degrees, DN 50, BS 2" sw socket or HDPE 56 mm

#### specification

- sound absorbing height adjustable levelling legs
- integral sand coated flange for secure bonding of under-tile waterproofing
- removable trap insert, 50 mm water seal (conforming to DIN EN 1253)
- height adjustable screws
- temporary blanking plate
- tiling gauges
- edge trim jigs

#### material

channel 304 stainless steel, trap polypropylene

#### Options for CeraLine F:

Any made-to-measure length up to 1200 mm can be supplied. Please enquire!

CeraLine 600 mm – 1100 mm can be used with the Poresta® BFR 75 unit!

The outlet connector can be supplied in ABS to suit British Standard sizes and PE-HD conforming to DIN EN 1519. Please enquire.

### Flow rates tested to DIN EN 1253:

| Nominal diameter | Product standard | Min. flow rate according to norm | Water level according to norm |
|------------------|------------------|----------------------------------|-------------------------------|
| DN 50            | DIN EN 1253      | 0.80 l/s                         | 20.00 mm                      |

### Spare parts:

523983 adjustable pedestals